

# Specification

**ETS**  
ENTA SOURCE CO., LTD.

ETSPL2G03D



**2.5G SFP 300m 850nm Duplex LC DDM**

**Contact US**

LINE@

@ets.online



087-412-2552



# ETSPL2G03D

## Features:

- ✧ Up to 2.67Gb/s Data Links
- ✧ Hot-Pluggable
- ✧ Duplex LC connector
- ✧ Up to 300m on 50/125µm MMF
- ✧ 850nm VCSEL laser transmitter
- ✧ Single +3.3V Power Supply
- ✧ Monitoring Interface Compliant with SFF-8472
- ✧ Maximum Power <1W
- ✧ Industrial /Extended/ Commercial operating temperature range: -40°C to 85°C/-5°C to 85°C/-0°C to 70°C Version available
- ✧ RoHS compliant and Lead Free

## Applications:

- ✧ SONET OC-48 / SDH STM -16
- ✧ SONET OC-12 / SDH STM -4
- ✧ SONET OC-3 / SDH STM -1
- ✧ Gigabit Ethernet
- ✧ 1x/2xFibre Channel

## Description:

ENTA SOURCE's ETSPL2G03D Transceivers are a high performance, cost effective module which have a duplex LC optics interface. They are compatible with the Small Form Factor Pluggable Multi-Sourcing Agreement (MSA) and Digital diagnostics functions are available via the 2-wire serial bus specified in SFF-8472. The receiver section uses a PIN receiver and the transmitter uses a 850 nm VCSEL laser, up to 7dB link budge ensure this module SONET OC-48 / SDH STM -16 300m application.

# ETSPL2G03D

## ● Absolute Maximum Ratings

| Parameter           | Symbol   | Min. | Typical | Max. | Unit |
|---------------------|----------|------|---------|------|------|
| Storage Temperature | $T_S$    | -40  |         | +85  | °C   |
| Supply Voltage      | $V_{CC}$ | -0.5 |         | 4    | V    |
| Relative Humidity   | RH       | 0    |         | 85   | %    |

## ● Recommended Operating Environment:

| Parameter                  | Symbol      | Min.  | Typical | Max.        | Unit |
|----------------------------|-------------|-------|---------|-------------|------|
| Case operating Temperature | Industrial  | $T_C$ | -40     | 85          | °C   |
|                            | Extended    |       | -5      | 85          | °C   |
|                            | Commercial  |       | 0       | +70         | °C   |
| Supply Voltage             | $V_{CC}$    | 3.135 |         | 3.465       | V    |
| Supply Current             | $I_{CC}$    |       |         | 300         | mA   |
| Inrush Current             | $I_{surge}$ |       |         | $I_{CC}+30$ | mA   |
| Maximum Power              | $P_{max}$   |       |         | 1           | W    |

## ● Electrical Characteristics( $T_{OP} = -40$ to $85^{\circ}\text{C}$ , $V_{CC} = 3.135$ to $3.465$ Volts)

| Parameter                      | Symbol         | Min.           | Typical | Max.           | Unit  | Note |
|--------------------------------|----------------|----------------|---------|----------------|-------|------|
| <b>Transmitter Section:</b>    |                |                |         |                |       |      |
| Input differential impedance   | $R_{in}$       | 90             | 100     | 110            |       |      |
| Single ended data input swing  | $V_{in PP}$    | 250            |         | 1200           | mVp-p |      |
| Transmit Disable Voltage       | $V_D$          | $V_{CC} - 1.3$ |         | $V_{CC}$       | V     | 2    |
| Transmit Enable Voltage        | $V_{EN}$       | $V_{EE}$       |         | $V_{EE} + 0.8$ | V     |      |
| Transmit Disable Assert Time   | $T_{dessert}$  |                |         | 10             | us    |      |
| <b>Receiver Section:</b>       |                |                |         |                |       |      |
| Single ended data output swing | $V_{out,pp}$   | 300            |         | 800            | mv    | 3    |
| LOS Fault                      | $V_{losfault}$ | $V_{CC} - 0.5$ |         | $V_{CC\_host}$ | V     | 5    |
| LOS Normal                     | $V_{los norm}$ | $V_{EE}$       |         | $V_{EE} + 0.5$ | V     | 5    |
| Power Supply Rejection         | PSR            | 100            |         |                | mVpp  | 6    |

# ETSPL2G03D

Note:

1. AC coupled.
2. Or open circuit.
3. Into 100 ohm differential termination.
4. 20 – 80 %
5. LOS is LVTTTL. Logic 0 indicates normal operation; logic 1 indicates no signal detected.
6. All transceiver specifications are compliant with a power supply sinusoidal modulation of 20 Hz to 1.5MHz up to specified value applied through the power supply filtering network shown on page 23 of the Small Form-factor Pluggable (SFP) Transceiver Multi-Source Agreement (MSA), September 14, 2000.

## ● Optical Parameters( $T_{OP} = -40$ to $85^{\circ}\text{C}$ , $V_{CC} = 3.135$ to $3.465$ Volts)

| Parameter                                            | Symbol                                        | Min. | Typical | Max.  | Unit  | Note |
|------------------------------------------------------|-----------------------------------------------|------|---------|-------|-------|------|
| Transmitter Section:                                 |                                               |      |         |       |       |      |
| Center Wavelength                                    | $\lambda_c$                                   | 830  | 850     | 860   | nm    |      |
| Spectral Width(RMS)                                  | $\sigma_{RMS}$                                |      |         | 0.85  | nm    |      |
| Optical Output Power                                 | $P_{out}$                                     | -10  |         | -3    | dBm   | 1    |
| Extinction Ratio                                     | ER                                            | 8.2  |         |       | dB    |      |
| Optical Rise/Fall Time                               | $t_r / t_f$                                   |      |         | 260   | ps    | 2    |
| Relative Intensity Noise                             | RIN                                           |      |         | -120  | dB/Hz |      |
| Total Generated Transmitter Jitter<br>(peak to peak) | $J_{Txp-p}$                                   |      |         | 0.07  | UI    |      |
| Total Generated Transmitter Jitter<br>(rms)          | $J_{Txrms}$                                   |      |         | 0.007 | UI    |      |
| Output Eye Mask                                      | Compliant with eye mask Telcordia GR-253-GORE |      |         |       |       |      |
| Receiver Section:                                    |                                               |      |         |       |       |      |
| Optical Input Wavelength                             | $\lambda_c$                                   | 770  |         | 860   | nm    |      |
| Rx Sensitivity @ OC-48/STM-16                        | $Sen_1$                                       |      |         | -18   | dBm   | 3    |
| Rx Sensitivity @ 2xFibre channel                     | $Sen_2$                                       |      |         | -18   | dBm   | 4    |
| Rx Sensitivity @ Gigabit Ethernet                    | $Sen_3$                                       |      |         | -18   | dBm   | 4    |
| Rx Sensitivity @ OC-12/STM-4                         | $Sen_4$                                       |      |         | -18   | dBm   | 5    |
| Rx Sensitivity @ OC-4/STM-1                          | $Sen_5$                                       |      |         | -18   | dBm   | 5    |
| Rx_LOS Assert                                        | $LOS_A$                                       | -29  |         |       | dBm   |      |
| Rx_LOS De-assert                                     | $LOS_D$                                       |      |         | -19   | dBm   |      |
| Rx_LOS Hysteresis                                    | $LOS_H$                                       | 0.5  |         |       | dB    |      |
| Receiver Overload                                    | $P_{ol}$                                      | 0    |         |       | dBm   |      |

# ETSPL2G03D

## General Specifications:

|                                                               |                   |     |     |            |      |  |
|---------------------------------------------------------------|-------------------|-----|-----|------------|------|--|
| Data Rate                                                     | BR                | 155 |     | 2667       | Mb/s |  |
| Bit Error Rate                                                | BER               |     |     | $10^{-12}$ |      |  |
| Max. Supported Link Length on 50/125µm MMF @ OC-48/STM-16     | L <sub>MAX1</sub> |     | 0.3 |            | km   |  |
| Max. Supported Link Length on 50/125µm MMF @ 2xFibre channel  | L <sub>MAX2</sub> |     | 0.5 |            | km   |  |
| Max. Supported Link Length on 50/125µm MMF @ Gigabit Ethernet | L <sub>MAX3</sub> |     | 1   |            | km   |  |
| Max. Supported Link Length on 50/125µm MMF @ OC-12/STM-4      | L <sub>MAX4</sub> |     | 1   |            | km   |  |
| Max. Supported Link Length on 50/125µm MMF @ OC-4/STM-1       | L <sub>MAX5</sub> |     | 1   |            | km   |  |

### Note:

1. Compliant with FDA/CDRH and EN (IEC) 60825 regulations (Class 1 Laser Safety).
2. 20-80%.
3. Measured with PRBS  $2^{31}-1$  at  $10^{-12}$  BER
4. Measured with PRBS  $2^7-1$  at  $10^{-12}$  BER
5. Measured with PRBS  $2^{23}-1$  at  $10^{-12}$  BER

## ● Pin Assignment

Diagram of Host Board Connector Block Pin Numbers and Name

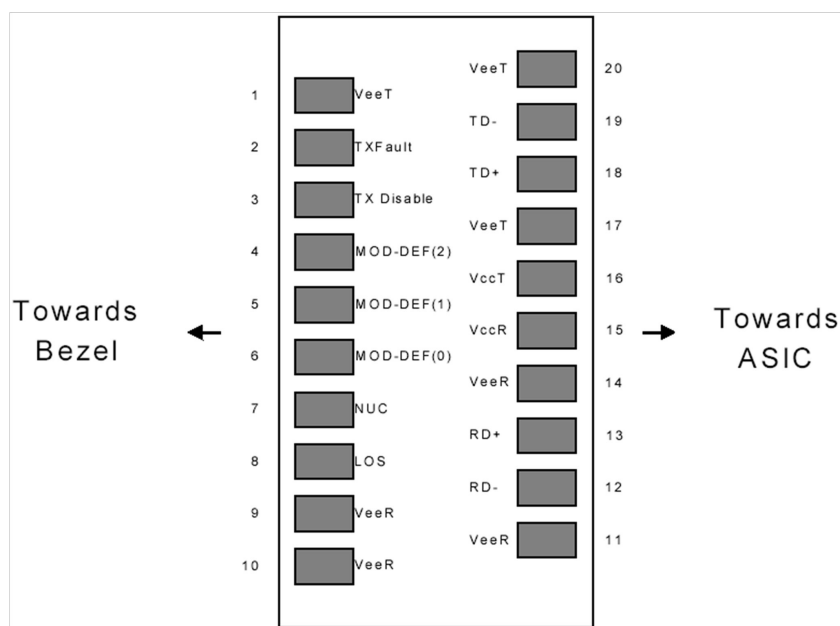


Diagram of Host Board Connector Block Pin Numbers and Names

## ● Pin Function Definitions

| Pin No | Name        | Function                     | Plug Seq | Notes |
|--------|-------------|------------------------------|----------|-------|
| 1      | VeeT        | Transmitter Ground           | 1        | 1     |
| 2      | TX Fault    | Transmitter Fault Indication | 3        |       |
| 3      | TX Disable  | Transmitter Disable          | 3        | 2     |
| 4      | MOD-DEF2    | Module Definition            | 2        | 3     |
| 5      | MOD-DEF1    | Module Definition 1          | 3        | 3     |
| 6      | MOD-DEF0    | Module Definition 0          | 3        | 3     |
| 7      | Rate Select | Not Connected                | 3        | 4     |
| 8      | LOS         | Loss of Signal               | 3        | 5     |
| 9      | VeeR        | Receiver Ground              | 1        | 1     |
| 10     | VeeR        | Receiver Ground              | 1        | 1     |
| 11     | VeeR        | Receiver Ground              |          | 1     |
| 12     | RD-         | Inv. Received Data Out       | 3        | 6     |
| 13     | RD+         | Received Data Out            | 3        | 6     |
| 14     | VeeR        | Receiver Ground              | 3        | 1     |
| 15     | VccR        | Receiver Power               | 2        | 1     |
| 16     | VccT        | Transmitter Power            | 2        |       |
| 17     | VeeT        | Transmitter Ground           | 1        |       |
| 18     | TD+         | Transmit Data In             | 3        | 6     |
| 19     | TD-         | Inv. Transmit In             | 3        | 6     |
| 20     | VeeT        | Transmitter Ground           | 1        |       |


### Notes:

1. Circuit ground is internally isolated from chassis ground.
2. Laser output disabled on TDIS >2.0V or open, enabled on TDIS <0.8V.
3. Should be pulled up with 4.7k - 10 kohms on host board to a voltage between 2.0V and 3.6V.  
MOD\_DEF(0) pulls line low to indicate module is plugged in.
4. Rate select is not used
5. LOS is open collector output. Should be pulled up with 4.7k – 10 kohms on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.
6. AC Coupled

## ● SFP Module EEPROM Information and Management

The SFP modules implement the 2-wire serial communication protocol as defined in the SFP -8472. The serial ID information of the SFP modules and Digital Diagnostic Monitor parameters can be accessed through the I<sup>2</sup>C interface at address A0h and A2h. The memory is mapped in Table 1. Detailed ID information (A0h) is listed in Table 2. And the DDM specification at address A2h. For more details of the memory map and byte definitions, please refer to the SFF-8472, “Digital Diagnostic Monitoring Interface for Optical Transceivers”. The DDM parameters have been internally calibrated.

**Table 1.** Digital Diagnostic Memory Map (Specific Data Field Descriptions)

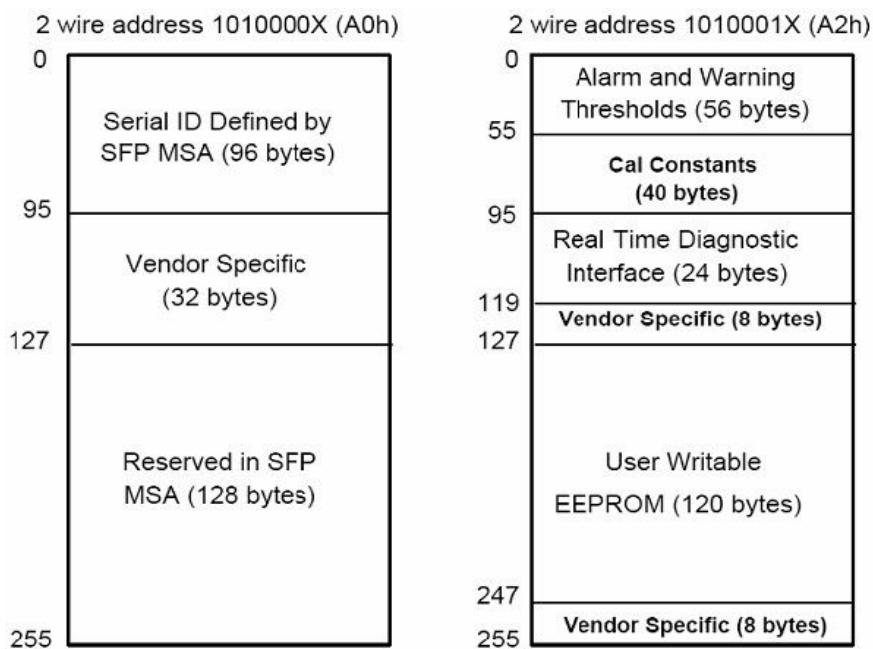

# ETSPL2G03D

**Table 2 - EEPROM Serial ID Memory Contents (A0h)**

| Data Address              | Length (Byte) | Name of Length | Description and Contents                                                                              |
|---------------------------|---------------|----------------|-------------------------------------------------------------------------------------------------------|
| Base ID Fields            |               |                |                                                                                                       |
| 0                         | 1             | Identifier     | Type of Serial transceiver (03h=SFP)                                                                  |
| 1                         | 1             | Reserved       | Extended identifier of type serial transceiver (04h)                                                  |
| 2                         | 1             | Connector      | Code of optical connector type (07=LC)                                                                |
| 3-10                      | 8             | Transceiver    |                                                                                                       |
| 11                        | 1             | Encoding       | NRZ(03h)                                                                                              |
| 12                        | 1             | BR, Nominal    | Nominal baud rate, unit of 100Mbps                                                                    |
| 13-14                     | 2             | Reserved       | (0000h)                                                                                               |
| 15                        | 1             | Length(9um)    | Link length supported for 9/125um fiber, units of 100m                                                |
| 16                        | 1             | Length(50um)   | Link length supported for 50/125um fiber, units of 10m                                                |
| 17                        | 1             | Length(62.5um) | Link length supported for 62.5/125um fiber, units of 10m                                              |
| 18                        | 1             | Length(Copper) | Link length supported for copper, units of meters                                                     |
| 19                        | 1             | Reserved       |                                                                                                       |
| 20-35                     | 16            | Vendor Name    | SFP vendor name: ENTA SOURCE                                                                          |
| 36                        | 1             | Reserved       |                                                                                                       |
| 37-39                     | 3             | Vendor OUI     | SFP transceiver vendor OUI ID                                                                         |
| 40-55                     | 16            | Vendor PN      | Part Number: "ETSPL2G03D" (ASCII)                                                                     |
| 56-59                     | 4             | Vendor rev     | Revision level for part number                                                                        |
| 60-62                     | 3             | Reserved       |                                                                                                       |
| 63                        | 1             | CCID           | Least significant byte of sum of data in address 0-62                                                 |
| Extended ID Fields        |               |                |                                                                                                       |
| 64-65                     | 2             | Option         | Indicates which optical SFP signals are implemented (001Ah = LOS, Tx_FAULT, Tx_DISABLE all supported) |
| 66                        | 1             | BR, max        | Upper bit rate margin, units of %                                                                     |
| 67                        | 1             | BR, min        | Lower bit rate margin, units of %                                                                     |
| 68-83                     | 16            | Vendor SN      | Serial number (ASCII)                                                                                 |
| 84-91                     | 8             | Date code      | ENTA SOURCE's Manufacturing date code                                                                 |
| 92-94                     | 3             | Reserved       |                                                                                                       |
| 95                        | 1             | CCEX           | Check code for the extended ID Fields (addresses 64 to 94)                                            |
| Vendor Specific ID Fields |               |                |                                                                                                       |
| 96-127                    | 32            | Readable       | ENTA SOURCE specific date, read only                                                                  |
| 128-255                   | 128           | Reserved       | Reserved for SFF-8079                                                                                 |

# ETSPL2G03D

## ● Digital Diagnostic Monitor Characteristics(A2h)


| Data Address | Parameter                                | Accuracy | Unit |
|--------------|------------------------------------------|----------|------|
| 96-97        | Transceiver Internal Temperature         | ±3.0     | °C   |
| 100-101      | Laser Bias Current                       | ±10      | %    |
| 100-101      | Tx Output Power                          | ±3.0     | dBm  |
| 100-101      | Rx Input Power                           | ±3.0     | dBm  |
| 100-101      | V <sub>CC3</sub> Internal Supply Voltage | ±3.0     | %    |

## ● Regulatory Compliance

The ETSPL2G03D complies with international Electromagnetic Compatibility (EMC) and international safety requirements and standards (see details in Table following).

|                                                           |                                                              |                                        |
|-----------------------------------------------------------|--------------------------------------------------------------|----------------------------------------|
| Electrostatic Discharge (ESD) to the Electrical Pins      | MIL-STD-883E<br>Method 3015.7                                | Class 1(>1000 V)                       |
| Electrostatic Discharge (ESD) to the Duplex LC Receptacle | IEC 61000-4-2<br>GR-1089-CORE                                | Compatible with standards              |
| Electromagnetic Interference (EMI)                        | FCC Part 15 Class B<br>EN55022 Class B (CISPR 22B)           | Compatible with standards              |
|                                                           | VCCI Class B                                                 |                                        |
| Laser Eye Safety                                          | FDA 21CFR 1040.10 and 1040.11<br>EN60950, EN (IEC) 60825-1,2 | Compatible with Class 1 laser product. |


## ● Recommended Circuit

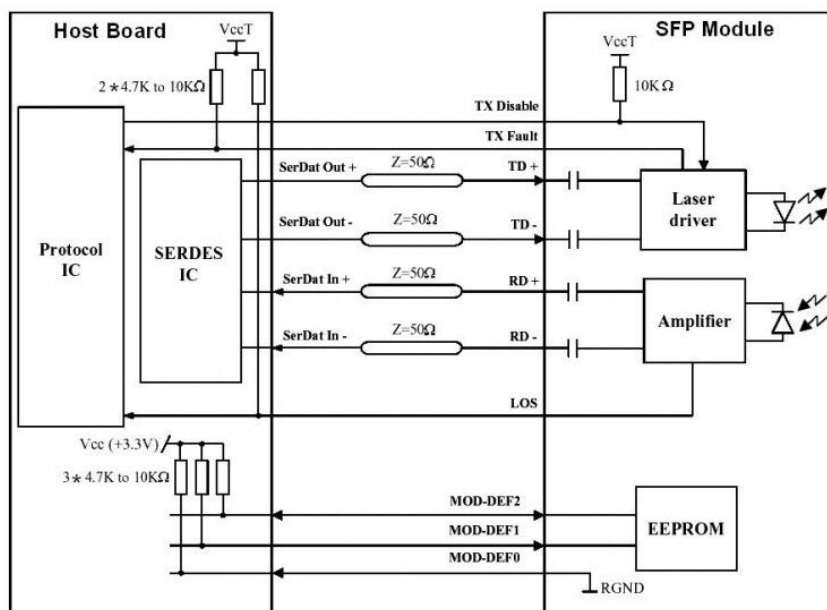

SFP Host Recommended Circuit

# ETSPL2G03D

- Mechanical Dimensions

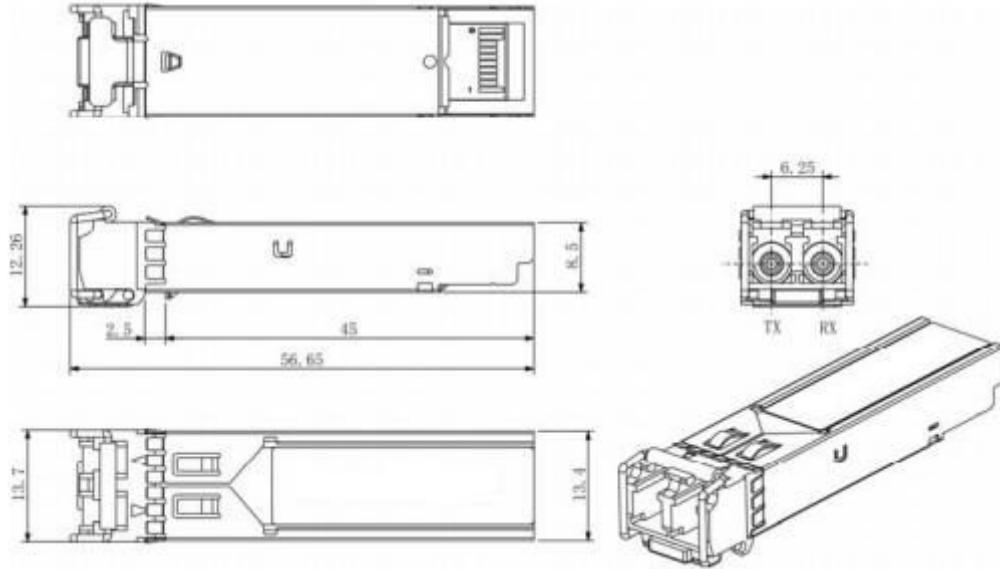

Mechanical Drawing

ENTA SOURCE reserves the right to make changes to the products or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such products or information.

Published by ENTA SOURCE Co., Ltd.

Copyright © ENTA SOURCE

All Rights Reserved