

ETS-ESI1022

Industrial Ethernet Switch

RoHS Compliant



Description

The equipment is a series of green DIN-rail industrial Ethernet Switch with low power consumption. They can be applied extensively in wind power, distribution network automation, subway PIS, power SCADA, wastewater treatment, metallurgy, intelligent transportation, rail transit, and many other industries.


Main Features

- Both standard and wide operating temperature
- Supports auto MDI/MDIX function
- Status LED for easy monitoring of device status
- Supports VLAN function
- Support power relay alarm output
- Support 8k MAC address
- Supports DIN-Rail and hang wall mounting
- Support dual power supply backup
- IP40 protection class


Specifications

Interface	ETS-ESI1022-4G2F	ETS-ESI1022-4G	ETS-ESI1022-2F	ETS-ESI1022-16T
Interface	4*GE SFP Fiber ports + 2*FE Fiber ports + 16*10/100M Ethernet ports	4*GE SFP Fiber ports + 16*10/100M Ethernet ports	2*FE Fiber ports + 16*10/100M Ethernet ports	16*10/100M Ethernet ports
Optical Port	100M Fiber Port : 100Base-Fx 1x9 , Connector optional 1000M Fiber Port : 1000Base-Fx SFP Transfer Distance: up to 120km Fiber core: 9/125μm on single-mode fiber, 50/125μm and 62.5μm on multi-mode fiber			/
Ethernet Port	Available speed: force 10Mbps, force 100Mbps and auto-detective 10/100Mbps Duplex mode: Full-Duplex and Half-Duplex auto-negotiation Connectors: RJ-45 Connector; MDI/MDI-X connection auto-sensing			
Relay port	2 bits 7.62mm terminal block			
Standard	IEEE802.3 (10Base-T) IEEE802.3u (100Base-TX/FX) IEEE 802.3ab (1000Base-T) IEEE 802.3z (1000Base-SX/LX/CX/T) IEEE802.3x (Flow control)		IEEE802.3 (10Base-T) IEEE802.3u (100Base-TX/FX) IEEE802.3x (Flow control)	
Switch Properties	MAC Table: 8K Packet Buffer: 4Mbit Switching Delay: <5μs			
LED Indicators	Running Status, Power Status, Relay alarm, FX Link/Act, TX Link/Act			
Power Requirement	Input: 12VDC~48VDC Input method : 4 bits 7.62mm terminal block Reverse Connection Protection: Support Redundancy Protection: Support Dual Power: Support			
Physical Characteristics	Housing: Metal enclosure Protection Class: IP40 Dimensions: 70 x 160 x 130mm Weight: 1.1kg Installation: DIN-Rail and Panel mounting			
Environmental Limits	Operating Temperature: -40°C to 85°C Storage Temperature: -40°C to 85°C Operating Humidity: 10% to 95% RH (non-condensing) Storage Humidity: 5% to 95% RH (non-condensing)			
Agency Approvals	FCC Part 15 of Class A & CE			
Industrial Standard	EMI: FCC/CE/LVD/EMC EMS: IEC61000-4-2 (ESD), IEC61000-4-3 (RS), IEC61000-4-4 (EFT), IEC61000-4-5 (Surge), IEC61000-4-6 (CS), IEC61000-4-16 (Common mode conduction) Shock: IEC 60068-2-27 Free Fall: IEC 60068-2-32 Vibration: IEC 60068-2-6			
Warranty	3 years			

Mechanical Drawing

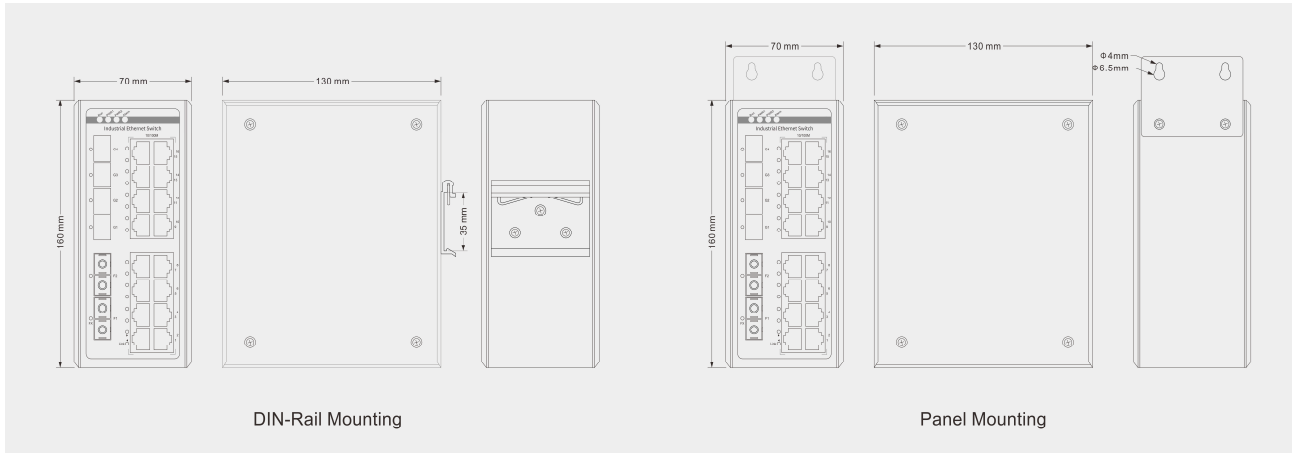

Mechanical Drawing

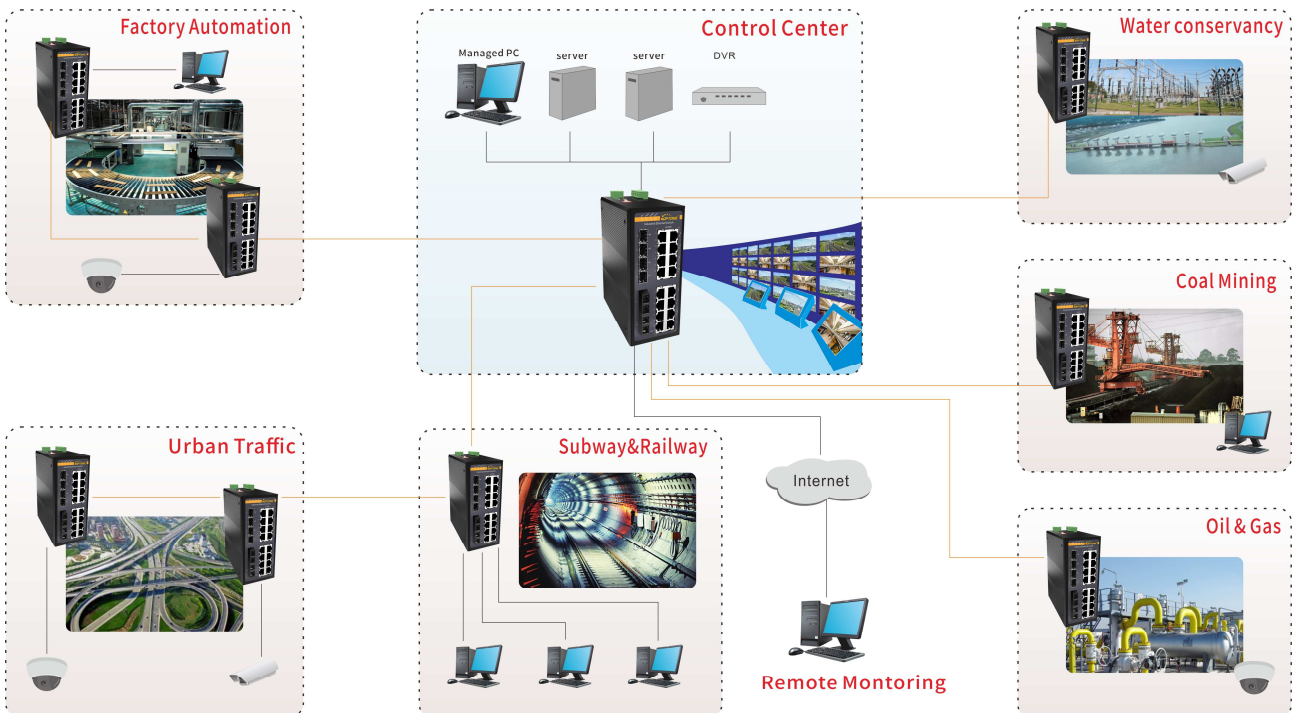

Ordering Information

ETS-ESI1022-4G2F	4*GE SFP Fiber ports + 2*FE Fiber ports + 16*10/100M Ethernet ports
ETS-ESI1022-4G	4*GE SFP Fiber ports + 16*10/100M Ethernet ports
ETS-ESI1022-2F	2*FE Fiber ports + 16*10/100M Ethernet ports
ETS-ESI1022-16T	16*10/100M Ethernet ports

Optional SFP

<i>Model</i>	<i>Rate</i>	<i>Wavelength</i>	<i>Distance</i>	<i>Connector</i>
SFP-SX-MM-0205I	1.25Gbps	850nm	0.5km	Duplex LC
SFP-LX-SM-0220I	1.25Gbps	1310nm	20km	Duplex LC
SFP-LX-SM-0240I	1.25Gbps	1310nm	40km	Duplex LC
SFP-ZX-SM-0280I	1.25Gbps	1550nm	80km	Duplex LC

Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must bespecifically confirmed in writing by ENTA SOURCE before they become applicable to any particular order or contact.In accordance with the ENTA SOURCE policy of continuous improvement specifications may change without notice.

The publication of information in this data sheet does not imply freedom from patent or other protective rights of ENTA SOURCE or others. Further details are available from any ENTA SOURCE sales representative.