

# Specification

**ETS**  
ENTA SOURCE CO., LTD.

**ETN9065-2GX16GT**



**2\*1000Base-X, 16\*10/100/1000Base-T  
Unmanaged Industrial Ethernet Switches**

**Contact US**

LINE@

@ets.online



087-412-2552



## Main Features

**2\*1000Base-X, 16\*10/100/1000Base-T**

**Unmanaged Industrial Ethernet Switches**

**Input Voltage:** DC12~58V(Non-PoE)

**Operating Temperature:** -40°C ~ +75°C

**Shell:** IP40 protection, fanless design

**Test Report:** CCC, RoHS, FCC, CE

**Anti-static:** 8KV-15KV

**MTBF:** 100000 Hour

## PRODUCT DESCRIPTION

This device is 2\*1000Base-X & 16\*10/100/1000Base-T Unmanaged Industrial Ethernet Switches. Through the fanless heat dissipation circuit design, wide range of working environment temperature, high protection level and other technologies, it provides excellent industrial quality with high/low temperature resistance and lightning protection, and enhances the reliability and safety of industrial networks. It can better meet the deployment requirements of rail transit, safe city, intelligent transportation, outdoor monitoring and other harsh environments.

# ETN9065-2GX16GT

## PRODUCT PARAMETERS


|                                               |                                               |
|-----------------------------------------------|-----------------------------------------------|
| <b>Provider Mode Ports</b>                    |                                               |
| Fixed port                                    | 2*1000 Base-X, 16*10/100/1000Base-T           |
| Power interface                               | Phoenix terminal, redundant dual power supply |
| LED Indicators                                | PWR, Link/ACT LED                             |
| <b>Cable Type &amp; Transmission Distance</b> |                                               |
| Twisted-pair                                  | 0-100m (CAT5e,CAT6)                           |
| Monomode optical fiber                        | 20/40/60/80/100KM                             |
| Multimode (optical) fiber                     | 550m                                          |
| <b>Network Topology</b>                       |                                               |
| Ring topology                                 | Unsupported                                   |
| Star topology                                 | Support                                       |
| Bus topology                                  | Support                                       |
| Tree Topology                                 | Support                                       |
| Hybrid topology                               | Support                                       |
| <b>Electrical Specifications</b>              |                                               |
| Input voltage                                 | DC12-58V (Non-PoE)                            |
| Total Power consumption                       | <26W (Non-PoE)                                |
| <b>Layer 2 Switching</b>                      |                                               |
| Switching capacity                            | 68G                                           |
| Packet forwarding rate                        | 50.59Mpps                                     |
| MAC address table                             | 16K                                           |
| Buffer                                        | 12M                                           |
| Forwarding delay                              | <10us                                         |
| MDX/MIDX                                      | Support                                       |
| Flow control                                  | Unsupported                                   |
| Jumbo Frame                                   | Support 10K Bytes                             |

# ETN9065-2GX16GT

| Environment                       |                                                                         |
|-----------------------------------|-------------------------------------------------------------------------|
| Operating temperature             | -40°C~+75°C<br>The device is tested for 4 hours at temperatures in 85°C |
| Storage temperature               | -40°C~+85°C                                                             |
| Relative humidity                 | 5%~95% non-condensing                                                   |
| Thermal methods                   | Fanless, natural cooling                                                |
| MTBF                              | 100,000 hours                                                           |
| Mechanical Dimensions             |                                                                         |
| Product size                      | 94*104*143mm                                                            |
| Installation Method               | DIN rail                                                                |
| Weight                            | 1KG around                                                              |
| EMC & Ingress Protection          |                                                                         |
| IP Level                          | IP40                                                                    |
| Surge protection of Power         | IEC 61000-4-5 Level X (6KV/6KV) (8/20us)                                |
| Surge protection of Ethernet port | IEC 61000-4-5 Level X (4KV/4KV) (10/700us)                              |
| RS                                | IEC 61000-4-3 Level 3 (10V/m)                                           |
| EFI                               | IEC 61000-4-4 Level 3 (1V/2V)                                           |
| CS                                | IEC 61000-4-6 Level 3 (10V/m)                                           |
| PFMF                              | IEC 61000-4-8 Level 4 (30A/m)                                           |
| DIP                               | IEC 61000-4-11 Level 3 (10V)                                            |
| ESD                               | IEC 61000-4-2 Level 4 (8K/15K)                                          |
| Free fall                         | 0.5m                                                                    |
| Authentication                    |                                                                         |
| Authentication                    | CCC, CE, FCC, RoHS                                                      |
| Accessories                       |                                                                         |
| Accessories                       | Device, Terminals, Specification, Certificate, power adapter(optional)  |

# ETN9065-2GX16GT

## SIZE AND APPEARANCE

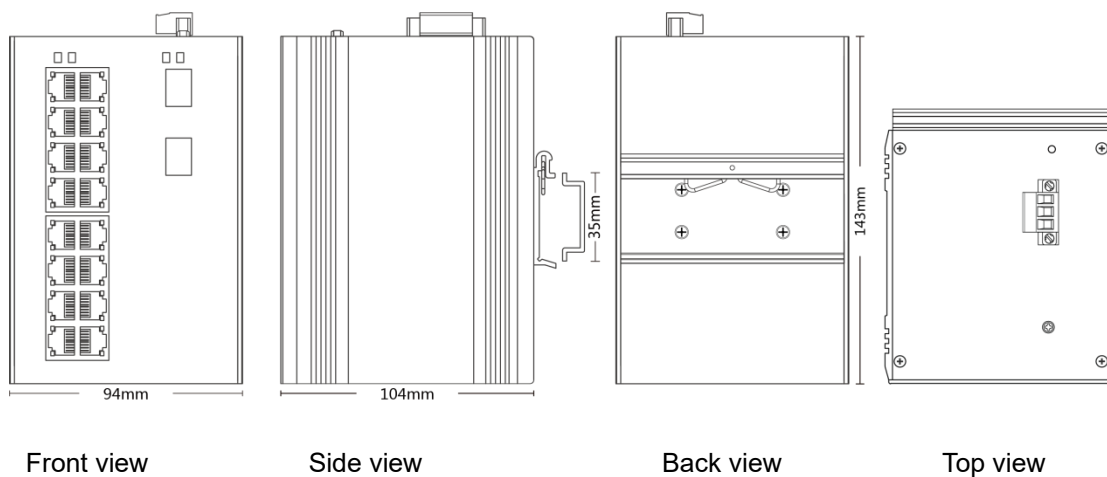

ENTA SOURCE reserves the right to make changes to the products or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such products or information.  
Published by ENTA SOURCE Co.,Ltd.  
Copyright © ENTA SOURCE  
All Rights Reserved