

Specification

ETS
ENTA SOURCE CO., LTD.

ETN9085-4XG16GX-8GC



Managed Industrial Switch

Contact US



@ets.online



087-412-2552



Main Features:

Power input: DC12~58V/ AC 100~240V
50/60Hz

Operate temperature: -40°C ~ +75°C

Shell: IP40 protection level, fanless design

Test report: CCC/CE/FCC/RoHS

Anti-static: 8KV-15KV


MTBF: 100000hours

PRODUCT DESCRIPTION


This model 4*10G fiber, 16*1000M fiber with 8*1000M combo ports, management industrial Ethernet switches, providing excellent industrial quality such as high/low temperature resistance, lightning protection, etc., through the design of fanless cooling circuit, wide range working environment temperature, high protection grade and other technologies. Besides, various rich protocols, such as integrated switching and security, support public Ethernet multi-ring protection technology (ERPS), greatly improve network flexibility and enhance the reliability and security of industrial networks. It can also meet the deployment requirements of rail transit, safe city, intelligent transportation, outdoor monitoring and other harsh environments.

ETN9085-4XG16GX-8GC

PRODUCTSIZE

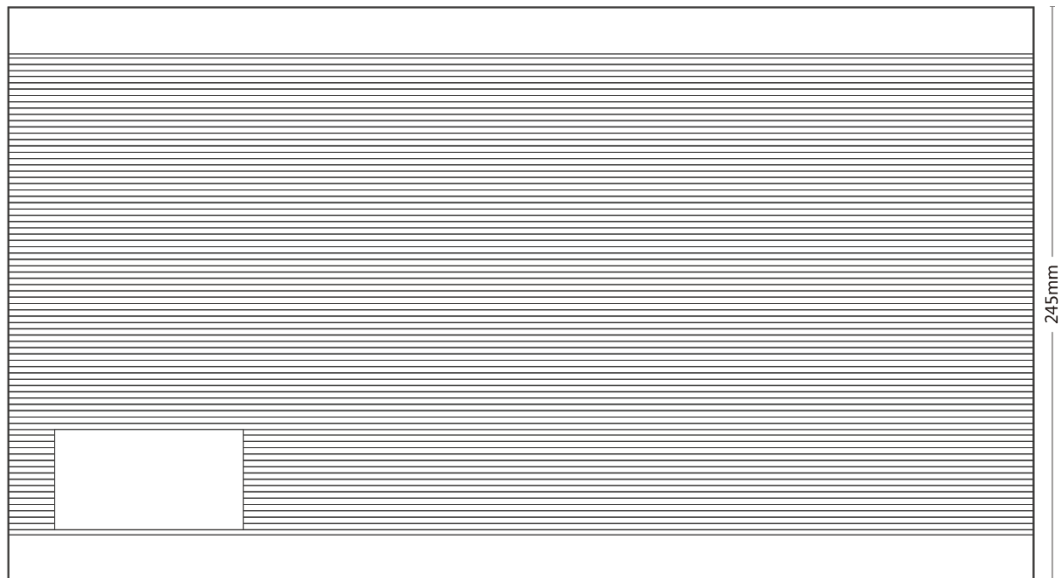

Side view

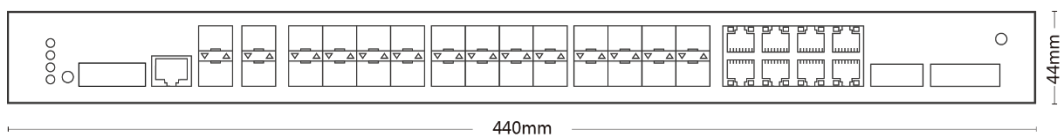

Front view

PRODUCT PARAMETERS

Provider Mode Ports	
Fixed port	4*10G Base-X, 16*1000 Base-X, 8*1000M combo
Management Port	Support console
Power interface	Phoenix terminal, dual power supply redundancy
LED Indicators	PWR, Link/ACT LED
Cable Type & Transmission Distance	
Twisted-pair	0-100m (CAT5e,CAT6)
Monomode optical fiber	20/40/60/80/100KM
Multimode optical fiber	550m
Network Topology	
Ring topology	Support
Star topology	Support
Bus topology	Support
Tree Topology	Support
Hybrid topology	Support

ETN9085-4XG16GX-8GC

Electrical Specifications	
Input voltage	DC12-58V/AC 100-240V 50-60HZ
Total Power consumption	<36W
Layer 2 Switching	
Switching capacity	160G
Packet forwarding rate	95.23Mpps
MAC address table	16K
VLAN	Support 4K
Buffer	12M
Forwarding delay	<10us
MDX/MIDX	Support
Flow control	Support
Jumbo Frame	Support 10Kbytes
Spanning Tree	Support STP/RSTP/MSTP
Ring Protocol	Support ERPS
Link Aggregation	Support 12group
Multicast	Support IGMP Snooping
Port Mirroring	Support
Storm Control	Support
Interface Counters	Support
QINQ	Support
802.1X	Support
Radius/Mac authentication	Support
Port Isolation	Support
Rmon	Support
NTP client	Support
DHCP client	Support
DHCP snooping	Support
Ping/tracer detection	Support
Dying gasp	Support
Fiber module DDM	Support
Convergence	
ACL	Support ACL 500 lines Support IP standard ACL Support MAC extended ACL Support IP extended ACL
QOS	Support QoS heavy markup, priority mapping; Support SP, WRR queue scheduling ; Support inlet speed limit, exit speed limit; Support flow based QoS
Management	
CLI	Support
Console	Support
Telnet	Support
WEB management	Support
SNMP	Support SNMPv1/v2c/v3
User Management	Support

ETN9085-4XG16GX-8GC

System Log	Support
Configuration File Download/Upload	Support
Upgrade Firmware	Support
Environment	
Operating temperature	-40°C~+75°C
Storage temperature	-40°C~+85°C
Relative humidity	5%~95% (non-condensing)
Thermal methods	Fanless design, natural cooling
MTBF	100,000 hours
Mechanical Dimensions	
Product size	440*245*44mm
Installation Method	Rack mounted
Weight	3.6KG
EMC & Ingress Protection	
IP Level	IP40
Surge protection of Power	AC: IEC 61000-4-5 Level 3 (4KV/2KV) (8/20us) DC: IEC 61000-4-5 Level X (8KV/8KV) (8/20us)
Surge protection of Ethernet port	IEC 61000-4-5 Level 3 (4KV/2KV) (10/700us)
RS	IEC 61000-4-3 Level 3 (10V/m)
EFI	IEC 61000-4-4 Level 3 (1V/2V)
CS	IEC 61000-4-6 Level 3 (10V/m)
PFMF	IEC 61000-4-8 Level4 (30A/m)
DIP	IEC 61000-4-11 Level3 (10V)
ESD	IEC 61000-4-2 Level 4 (8K/15K)
Free fall	0.5m
Authentication	
Authentication	CCC/CE/FCC/RoHS
Accessories	
Accessories	Equipment, terminals, power adapter(optional), Instructions, product certification

ENTA SOURCE reserves the right to make changes to the products or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such products or information.

Published by ENTA SOURCE Co.,Ltd.

Copyright © ENTA SOURCE

All Rights Reserved